


Cosmetic mirrors

17613019003 Cosmetic mirror

PRODUCT



DRAWING

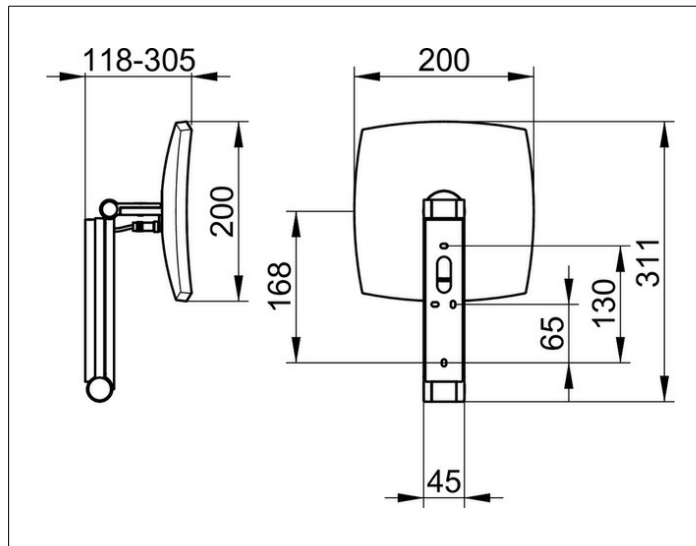

PRODUCT ATTRIBUTES

illuminated, 1 light colour 6500 kelvin (day light),
operation by light switch, in-wall cable layout,
on pivoted rail adjustable in three dimensions,
one-sided mirror, magnification factor x 5

Operation:

Light switch (not included in delivery)

Power supply:

Mains connection via wall socket

12 V in-wall adapter, input 220-240 V,

standby consumption: 0 watt

Illumination:

LED 7 watt (lifespan > 50.000 hours)

EEK: D , 8 kWh/1000h

SURFACE

chrome-plated

DIMENSION

1 Lichtfarbe, ohne Kabel

SPECIFICATIONS

KEUCO iLook_move cosmetic mirror, 17613019003

high quality cosmetic mirror, square,

chrome-plated, illuminated,

on pivoted rail,

wall mounted surface with 4 fixing point

for an optimal load distribution,

adjustable in three dimensions,

one sided mirror,

magnification factor x 5,

Mains connection via wall socket,

12V in-wall adapter (included),

input 220-240 V and in-wall cable layout,

Illumination: 1 x 7 Watt LED (maintenance-free),

Standby consumption: smaller 0,5 Watt,

Operation by light switch

not included in delivery,

1 light colour: 6500 Kelvin (daylight),

Height wall fixing 180 mm, width ca. 45 mm,

max. height ca. 500 mm,

outside diameter 200 x 200 mm, max. depth ca. 300 mm,

The cosmetic mirror is fixed concealed

Delivery includes anti-corrosion fixings

Note:

In-wall power supply and low voltage connecting cable (500 mm)
are included in delivery.

Due to the in-wall cable routing the position of the cosmetic mirror
must be already defined in shell construction.

For the in-wall cable routing and the integration of the in-wall power supply
we offer according to type of wall suitable rough sets.

Please order separately:

Rough part wall socket for cavity wall installation: Art.Nr. 17699000003

Rough part wall socket for mounting to the brickwork: Art.Nr. 17699000004