

Plan

14943000610 Shower curtain PLAN uni

PRODUCT



PRODUCT ATTRIBUTES

100% trevira, 0.165 lb/ft²
vertical seams
reinforced for stainless steel eyelets
Distance between eyelets appr. 7-7/8 inch
Weighted seam 1.76 oz per 39-3/8 inch
impregnated, fungicide, antibacterial, antistatic
washable at 30° C / 86° F, shrinkage appr. 1-2%
tested acc. to OEKO-Tex Standard 100
complete with curtain rings, white


SURFACE

anthracite/8 eyelets

DIMENSION

70,87 x 55,12 "

DRAWING

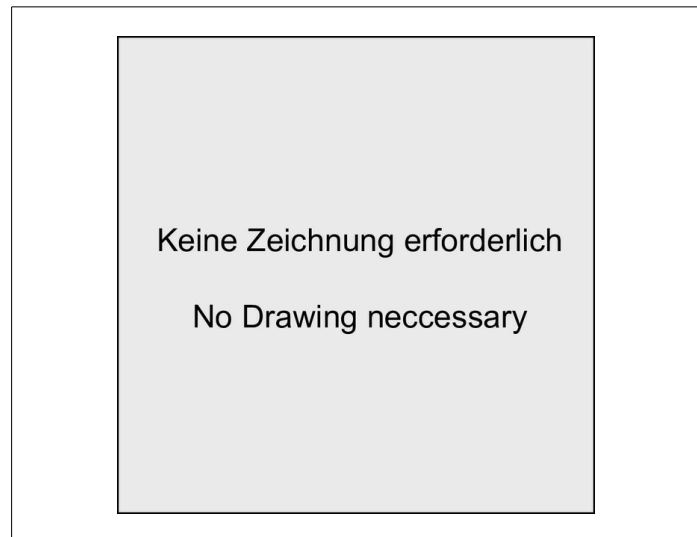

SPECIFICATIONS

KEUCO shower curtain PLAN uni, 14943000110, 55-2/16" x 70-14/16",
anthracite, 8 eyelets
100% trevira, 0.0165 lb/ft², vertical seams
reinforced for stainless steel eyelets,
distance between eyelets approx. 7-7/8",
weighted seam 1.76 oz per 39-3/8"
impregnated, fungizid, antibacterial, anitstatic,
washable at 30° C / 86° F, shrinkage appr, 1-2%,
tested acc, to OEKO-Tex Standard 100
complete with curtain rings, white

Information concerning the measurements:

All dimensions refer to the actual finish size,

In order for the shower curtain not to touch the bottom of the bath
tub or the floor we recommend the following:

Distance between the floor and the bottom edge of the curtain appr, 1-3/16",
Distance between the centre of the curtain pole and the top edge of the
curtain

appr, 1-9/16",

Please allow appr, 1,3 to 1,5 times curtain pole length when
calculating the required width of the curtain,

Warranty: KEUCO products are covered by a 5-year manufacturer's warranty, in effect from the date of purchase. During this time, proven product defects will be remedied free of charge.
Warranty claims must be filed in writing, including a detailed description of the defect immediately after a defect has occurred. For a copy of our detailed product warranty policy,
please contact us at office-usa@keuco.com.

Installation: KEUCO products must be installed by a qualified professional in accordance with the respective installation guidelines and any applicable federal / local building codes and regulations.