





Optiunile instalatie:





Standard installation (Right handle)

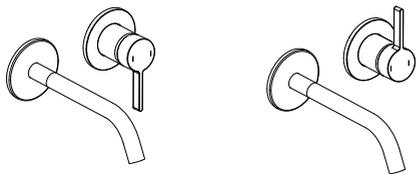


1

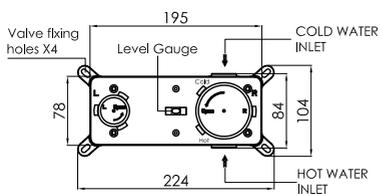


2

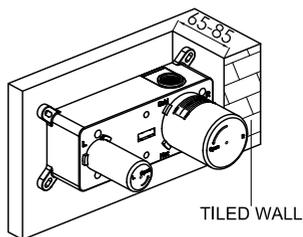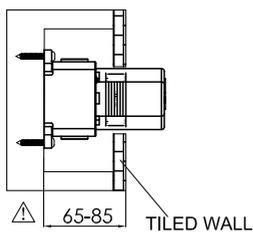


3

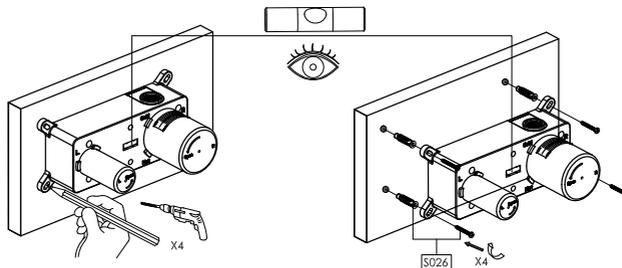



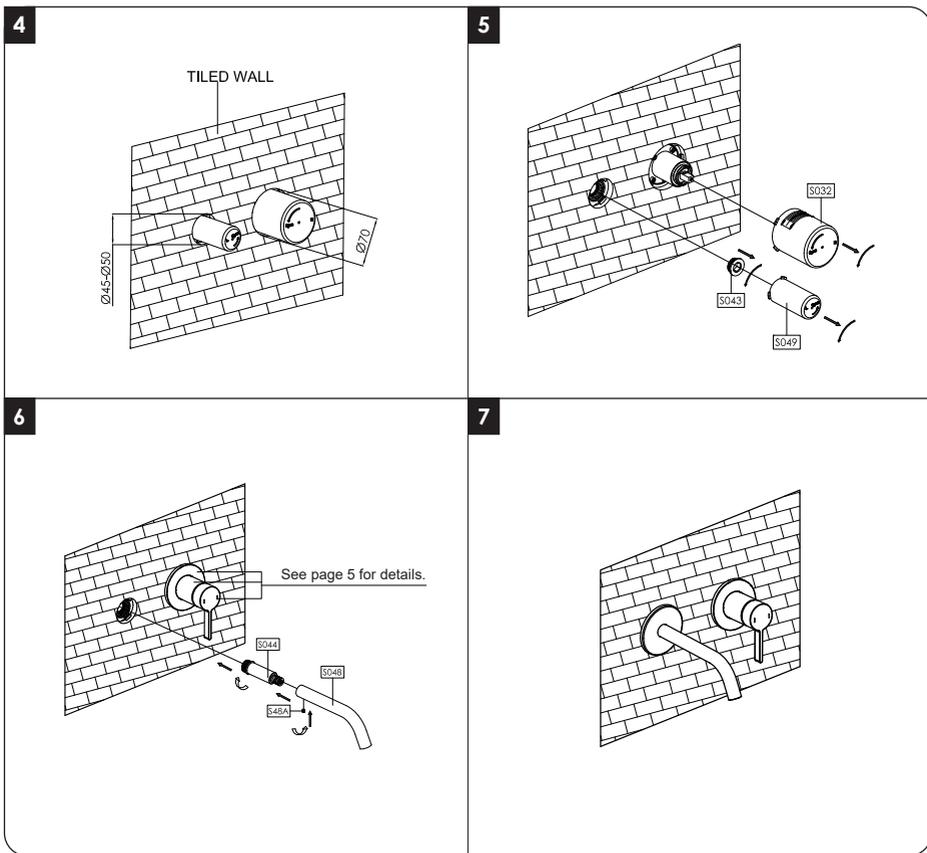


Calibrate the handle direction



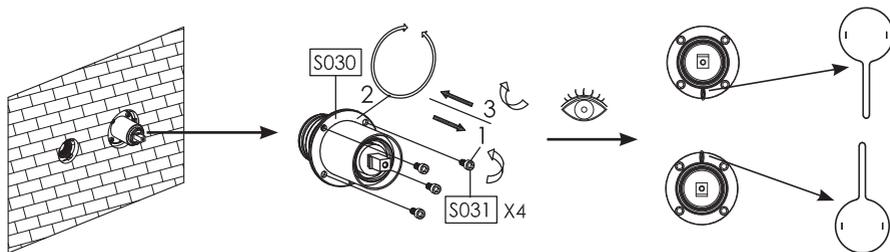










 **Make sure the direction of the handle lever is the same direction as the black dot.**

Optional installation -(Left handle)

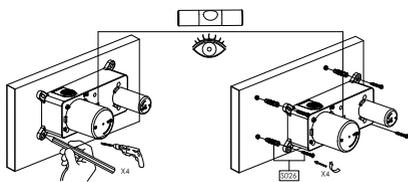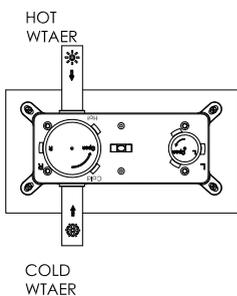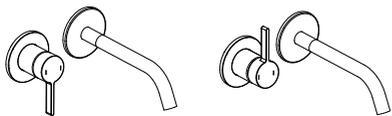

Optional installation -(Top handle)

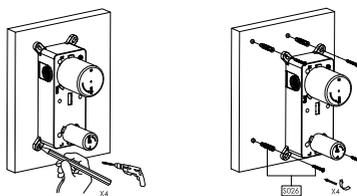

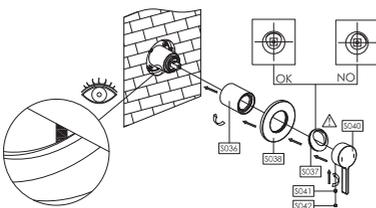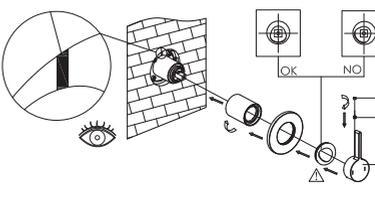	Handle lever down	Handle lever up
Valve		
Installation Diagram		
Function		
Available models		

Installation Instructions

- Avoid using cleaners containing hydrochloric acid, formic acid, concentrated caustic soda, chlorine bleach, or acetic acid, as these can cause significant damage.
- Mixing cleaning agents is generally not allowed.
- Do not use cleaning agents or tools with an abrasive effect, such as unsuitable cleaning powders, scouring pads or microfibre cloths.
- The use of steam cleaners is not allowed as the high temperatures can damage the products.